


Data sheet

L682007 - Flex Strip Dim-To-Warm 1200

PROLED®

Article name: Flex Strip Dim-To-Warm 1200

Article number: L682007

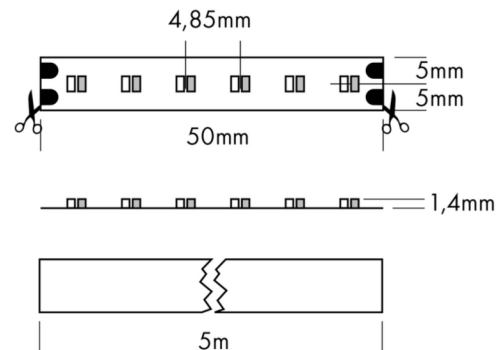

Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities. The DIM-TO-WARM STRIP changes during dimming the colour temperature from 3000K to 2400K (similar as the dimming of a halogen lamp).

- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

Technical:

Mounting type:	Surface-mounted on ceiling	Electric:	
Adjustability:	Fixed	System power:	14.4 W
Controllability:	Dimmable, Colour adjustable	Current:	24 V
Safety:	IP20	Safety class:	3
Temperature range:	-10...45 °C	EEL:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	32.82

Shape and dimensions:



Length:	1000 mm
Width:	10 mm
Height:	2 mm
Weight:	-

Status 08.12.2020

Technical amendments and errors reserved.


Light output 1 (LED 3000K - 2400K - CRI 90):

Lamp type:	LED
Lamp power:	14.4 W
Total luminous flux:	700 lm
Light efficiency:	48.6 lm/W
CCT:	3000 K
CRI:	90
Light distribution:	(Symmetrical) Wide flood (half value angle 45° ... 125°)

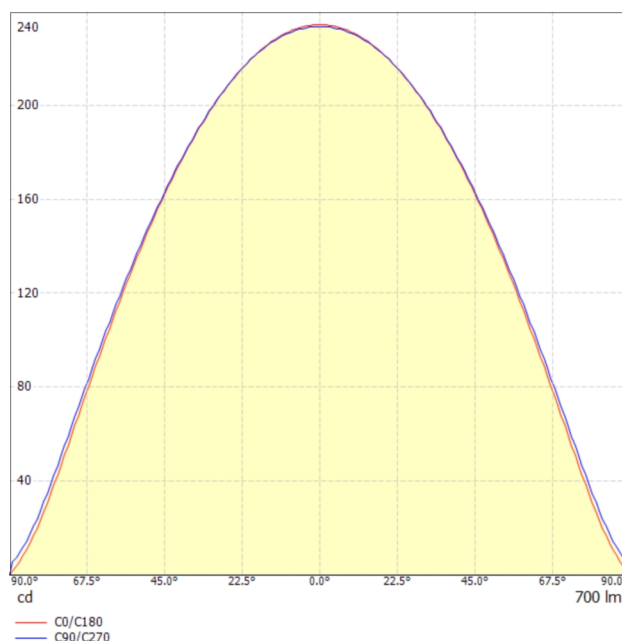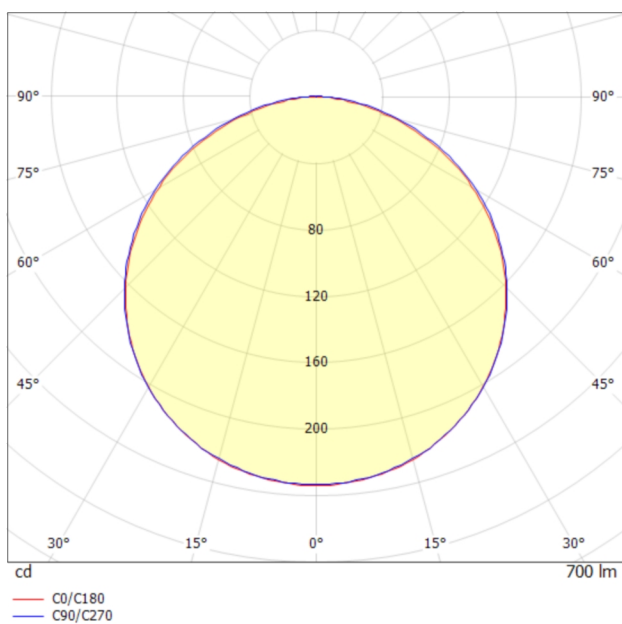

Data sheet

L682007 - Flex Strip Dim-To-Warm 1200

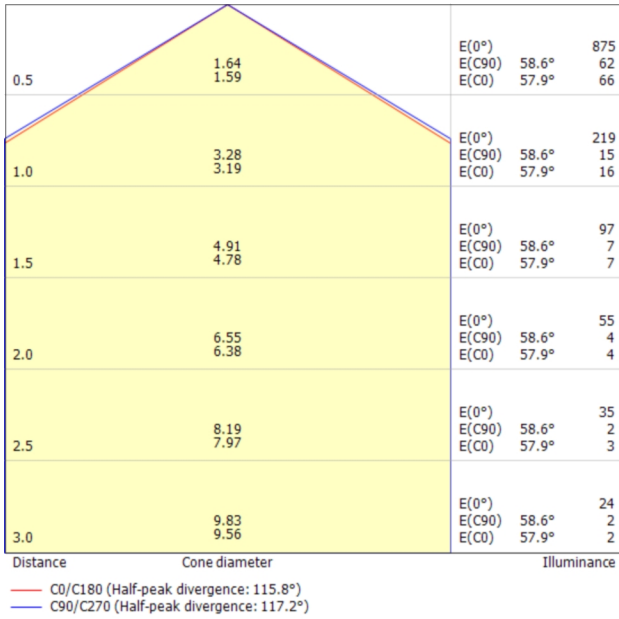

Glare evaluation according to UGR

Room size	X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
p Ceiling	70	70	50	50	30	30	70	70	50	50	30	30
p Walls	50	30	50	30	30	30	50	30	50	30	30	30
p Floor	20	20	20	20	20	20	20	20	20	20	20	20
Room size	X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
2H	2H		28.9	30.2	29.2	30.4	30.7	28.9	30.3	29.2	30.5	30.8
2H	3H		30.4	31.7	30.8	31.9	32.2	30.6	31.8	30.9	32.1	32.4
2H	4H		31.1	32.2	31.4	32.5	32.8	31.3	32.4	31.6	32.7	33.0
2H	6H		31.5	32.6	31.9	32.9	33.2	31.8	32.8	32.1	33.1	33.5
2H	8H		31.6	32.6	32.0	33.0	33.3	31.9	33.0	32.3	33.3	33.6
2H	12H		31.7	32.7	32.1	33.0	33.3	32.1	33.0	32.4	33.4	33.7
4H	2H		29.6	30.7	29.9	31.0	31.3	29.6	30.8	30.0	31.1	31.4
4H	3H		31.4	32.3	31.7	32.7	33.0	31.5	32.5	31.9	32.8	33.1
4H	4H		32.1	33.0	32.5	33.3	33.7	32.3	33.2	32.7	33.5	33.9
4H	6H		32.6	33.4	33.1	33.8	34.2	32.9	33.7	33.3	34.1	34.5
4H	8H		32.8	33.5	33.3	33.9	34.3	33.1	33.8	33.6	34.2	34.7
4H	12H		32.9	33.6	33.4	34.0	34.4	33.3	33.9	33.8	34.4	34.8
8H	4H		32.4	33.1	32.9	33.5	33.9	32.6	33.3	33.0	33.7	34.1
8H	6H		33.1	33.7	33.6	34.1	34.6	33.3	33.9	33.8	34.4	34.8
8H	8H		33.4	33.9	33.8	34.3	34.8	33.7	34.2	34.1	34.6	35.1
8H	12H		33.5	34.0	34.0	34.4	34.9	33.9	34.3	34.4	34.8	35.3
12H	4H		32.5	33.1	32.9	33.5	33.9	32.6	33.2	33.1	33.7	34.1
12H	6H		33.2	33.7	33.7	34.1	34.6	33.4	33.9	33.9	34.4	34.9
12H	8H		33.5	33.9	34.0	34.4	34.9	33.8	34.2	34.2	34.7	35.2
Variation of the observer position for the luminaire distances S												
S = 1.0H	+0.1 / -0.1					+0.1 / -0.1						
S = 1.5H	+0.2 / -0.3					+0.2 / -0.3						
S = 2.0H	+0.4 / -0.7					+0.4 / -0.6						
Standard table	BK06					BK06						
Correction summand	16.2					16.4						
Correction glare indices referring to 700lm total luminous flux												

Status 08.12.2020

Technical amendments and errors reserved.