



Data sheet

L64806 - Flex Strip Side View Mono - WW

PROLED®

Article name: Flex Strip Side View Mono - WW

Article number: L64806

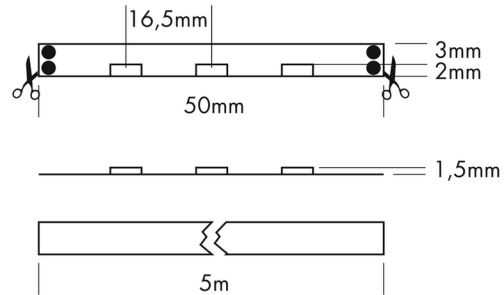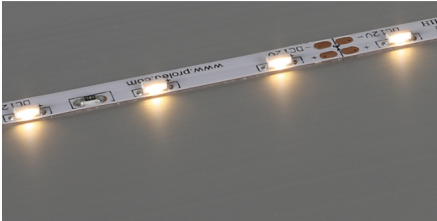

Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive)
- LEDs side emission of light
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

Technical:

Mounting type:	Surface-mounted on ceiling	Electric:	
Adjustability:	Fixed	System power:	4.8 W
Controllability:	Dimmable	Current:	12 V
Safety:	IP20	Safety class:	3
Temperature range:	-10...45 °C	EEL:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	29.84

Shape and dimensions:

Length:	1000 mm
Width:	5 mm
Height:	2 mm
Weight:	-

Status 08.12.2020



Technical amendments and errors reserved.

PROLED®

MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany
Phone +49.821.60099-0 | Fax +49.821.60099-99
info@proled.com | proled.com

Light output 1 (LED 3000K - CRI 80):

Lamp type:	LED
Lamp power:	4.8 W
Total luminous flux:	360 lm
Light efficiency:	75 lm/W
CCT:	3000 K
CRI:	80
Light distribution:	(Symmetrical) Wide flood (half value angle 45° ... 125°)

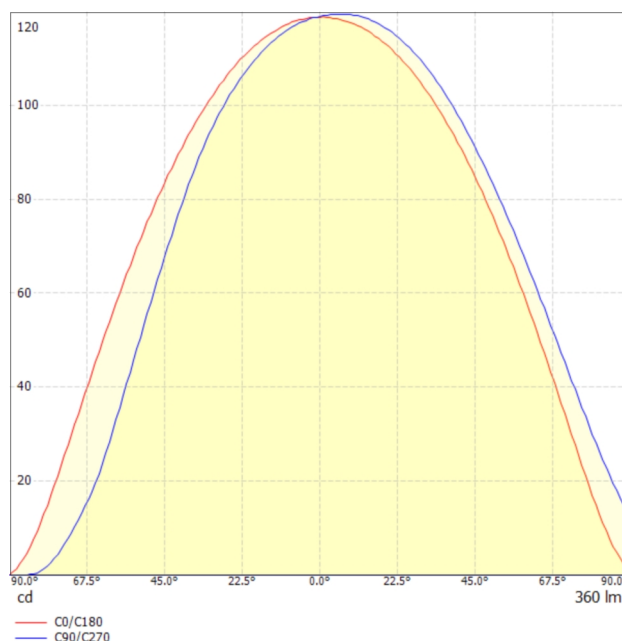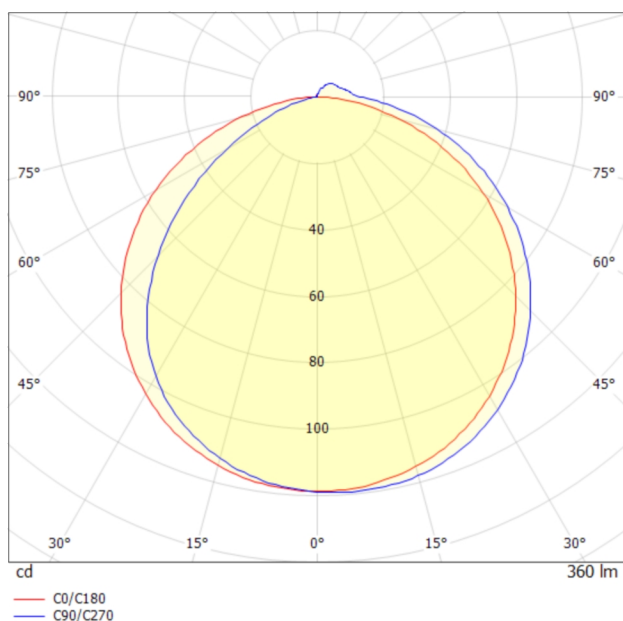

Data sheet

L64806 - Flex Strip Side View Mono - WW

PROLED[®]

Status 08.12.2020

Technical amendments and errors reserved.

PROLED[®]
MBN GmbH | Balthasar-Schaller-Str. 3 | 86316 Friedberg | Germany
Phone +49.821.60099-0 | Fax +49.821.60099-99
info@proled.com | proled.com