


Article name: Flex Strip 300 Mono - SWW

Article number: L62826

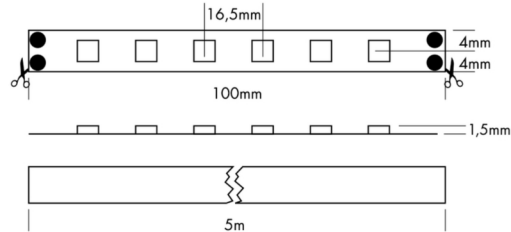

## Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility - adaptable to round shapes.
- Neutral white, warm white and super warm white for customizing also available in 20m reels. Please pay attention to the maximum length (5m) per power input.
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

## Technical:



<b>Mounting type:</b>	Surface-mounted on ceiling	<b>Electric:</b>	
<b>Adjustability:</b>	Fixed	System power:	4.8 W
<b>Controllability:</b>	Dimmable	Current:	24 V
<b>Safety:</b>	IP20	Safety class:	3
<b>Temperature range:</b>	-10...45 °C	EEL:	A++ - A
<b>Lifetime:</b>	50.000 h at L80B10	UGR:	28.65

## Shape and dimensions:

Length:	1000 mm
Width:	8 mm
Height:	2 mm
Weight:	-

**Light output 1 (LED 2700K - CRI 90):**

<b>Lamp type:</b>	LED
<b>Lamp power:</b>	4.8 W
<b>Total luminous flux:</b>	420 lm
<b>Light efficiency:</b>	87.5 lm/W
<b>CCT:</b>	2700 K
<b>CRI:</b>	90
<b>Light distribution:</b>	(Symmetrical) Wide flood (half value angle 45° ... 125°)

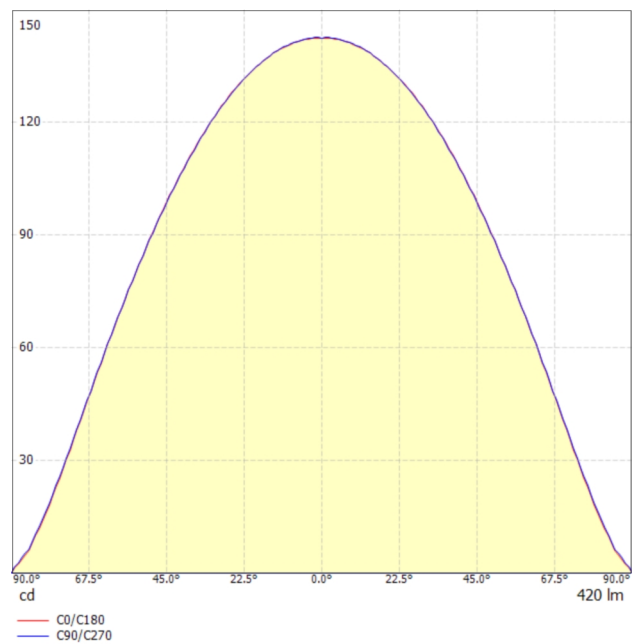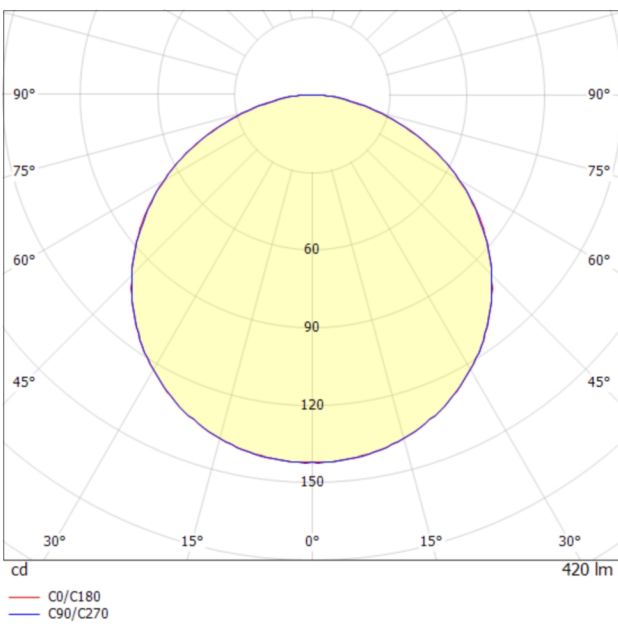

# Data sheet

L62826 - Flex Strip 300 Mono - SWW



0.5	1.58	E(0°) E(C0)	57.7°	443 34
1.0	3.16	E(0°) E(C0)	57.7°	111 8
1.5	4.75	E(0°) E(C0)	57.7°	49 4
2.0	6.33	E(0°) E(C0)	57.7°	28 2
2.5	7.91	E(0°) E(C0)	57.7°	18 1
3.0	9.49	E(0°) E(C0)	57.7°	12 1

Distance                      Cone diameter                      Illuminance

— C0/C180 (Half-peak divergence: 115.4°)

Glare evaluation according to UGR													
Room size		Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
X	Y	2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H	12H
p Ceiling		70	70	50	50	30	30	70	70	50	50	30	30
p Walls		50	30	50	30	30	30	50	30	50	30	30	30
p Floor		20	20	20	20	20	20	20	20	20	20	20	20
2H	2H	24.8	26.1	25.1	26.4	26.6	24.8	26.1	25.1	26.4	26.6	24.8	26.6
2H	3H	26.4	27.6	26.7	27.8	28.1	26.4	27.6	26.7	27.9	28.1	26.4	28.1
2H	4H	27.0	28.1	27.3	28.4	28.7	27.0	28.1	27.3	28.4	28.7	27.0	28.7
2H	6H	27.4	28.4	27.7	28.7	29.1	27.4	28.5	27.8	28.8	29.1	27.4	29.1
2H	8H	27.5	28.5	27.9	28.8	29.2	27.5	28.6	27.9	28.9	29.2	27.5	29.2
2H	12H	27.6	28.5	27.9	28.9	29.2	27.6	28.6	28.0	28.9	29.3	27.6	29.3
4H	2H	25.5	26.6	25.8	26.9	27.2	25.5	26.6	25.8	26.9	27.2	25.5	27.2
4H	3H	27.2	28.2	27.6	28.5	28.9	27.3	28.2	27.6	28.6	28.9	27.3	28.9
4H	4H	28.0	28.8	28.4	29.2	29.6	28.0	28.8	28.4	29.2	29.6	28.0	29.6
4H	6H	28.5	29.2	28.9	29.6	30.0	28.5	29.3	29.0	29.7	30.1	28.5	30.1
4H	8H	28.7	29.3	29.1	29.7	30.2	28.7	29.4	29.1	29.8	30.2	28.7	30.2
4H	12H	28.8	29.4	29.2	29.8	30.2	28.8	29.4	29.3	29.9	30.3	28.8	30.3
8H	4H	28.3	28.9	28.7	29.3	29.8	28.3	29.0	28.7	29.4	29.8	28.3	29.8
8H	6H	28.9	29.5	29.4	29.9	30.4	28.9	29.5	29.4	29.9	30.4	28.9	30.4
8H	8H	29.1	29.6	29.6	30.1	30.6	29.2	29.7	29.7	30.1	30.6	29.2	30.6
8H	12H	29.3	29.7	29.8	30.2	30.7	29.4	29.8	29.9	30.3	30.8	29.4	30.8
12H	4H	28.3	28.9	28.7	29.3	29.8	28.3	28.9	28.7	29.3	29.8	28.3	29.8
12H	6H	29.0	29.5	29.4	29.9	30.4	29.0	29.5	29.5	29.9	30.4	29.0	30.4
12H	8H	29.2	29.7	29.7	30.1	30.6	29.3	29.7	29.8	30.2	30.7	29.3	30.7

Variation of the observer position for the luminaire distances S		
S = 1.0H	+0.1 / -0.1	+0.1 / -0.1
S = 1.5H	+0.2 / -0.3	+0.2 / -0.3
S = 2.0H	+0.4 / -0.7	+0.4 / -0.7

Standard table	BK06	BK06
Correction summand	12.0	12.1

Correction glare indices referring to 420lm total luminous flux