



# Data sheet

L682926 - Flex Strip IP62 800 Mono - SWW

# PROLED®

Article name: Flex Strip IP62 800 Mono - SWW

Article number: L682926

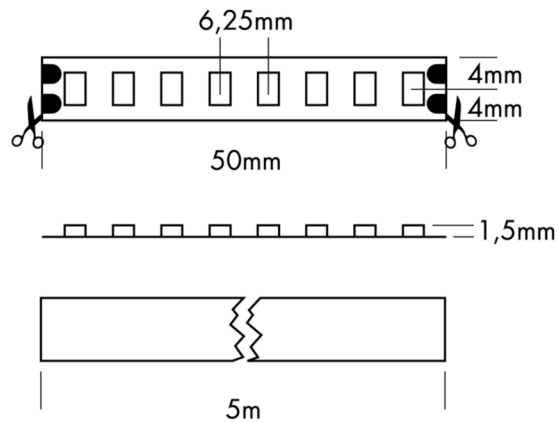

## Article description:

The PROLED FLEX STRIPS are perfect for indirect lighting, as custom made versions for fair or shop applications as well as for all kinds of illumination. Due to their shallow design and the individually adaptable lengths the PROLED FLEX STRIPS offer a wide spectrum of application possibilities.

- High flexibility - adaptable to round shapes.
- Installation with 3M adhesive tape on the strip's backside (self adhesive).
- dimmable and controllable via DMX 512, DALI, KNX, 1-10V, CASAMBI, RF by MULTI power supplies/controller

## Technical:

<b>Mounting type:</b>	Surface-mounted on ceiling	<b>Electric:</b>	
<b>Adjustability:</b>	Fixed	System power:	10 W
<b>Controllability:</b>	Dimmable	Current:	24 V
<b>Safety:</b>	IP62	Safety class:	3
<b>Temperature range:</b>	-10...45 °C	EEL:	E
<b>Lifetime:</b>	50.000 h at L80B10	UGR:	31,44

## Shape and dimensions:



Length:	1000 mm
Width:	8 mm
Height:	2 mm
Weight:	-

State 02.11.2022

Technical amendments and errors reserved.


## Light output 1 (LED 2700K - CRI 90):

<b>Lamp type:</b>	LED
<b>Lamp power:</b>	10 W
<b>Total luminous flux:</b>	1200 lm
<b>Light efficiency:</b>	120 lm/W
<b>CCT:</b>	2700 K
<b>CRI:</b>	-
<b>Light distribution:</b>	(Symmetrical) Wide flood (half value angle 45° ... 125°)

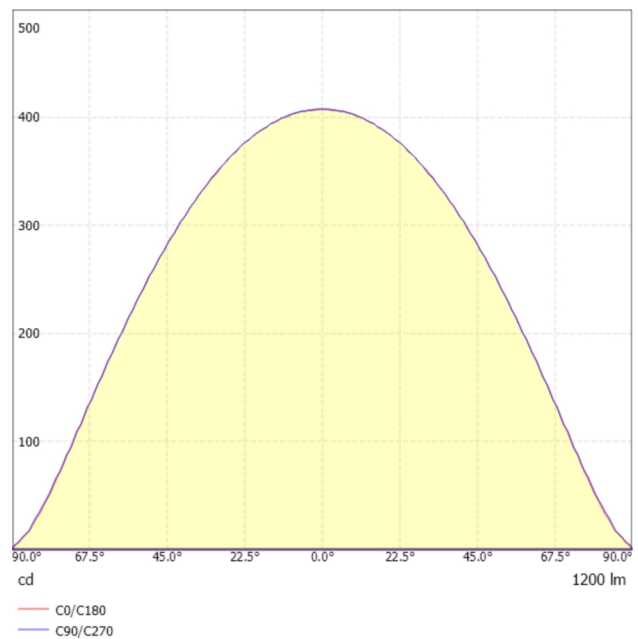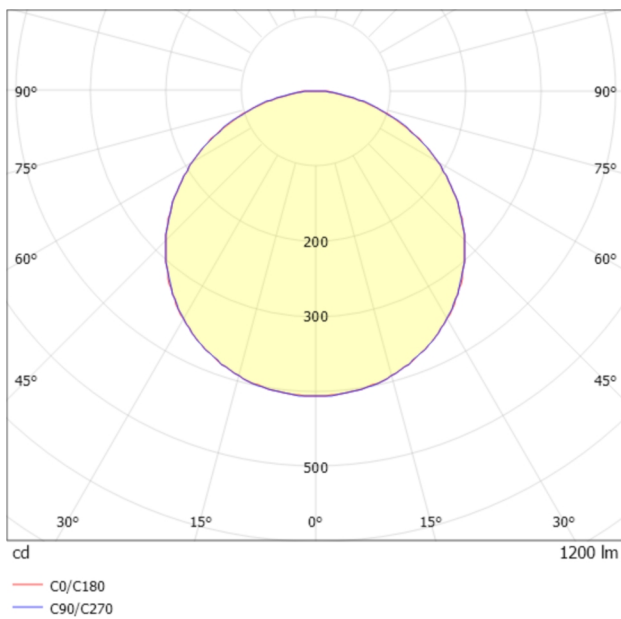

# Data sheet

L682926 - Flex Strip IP62 800 Mono - SWW

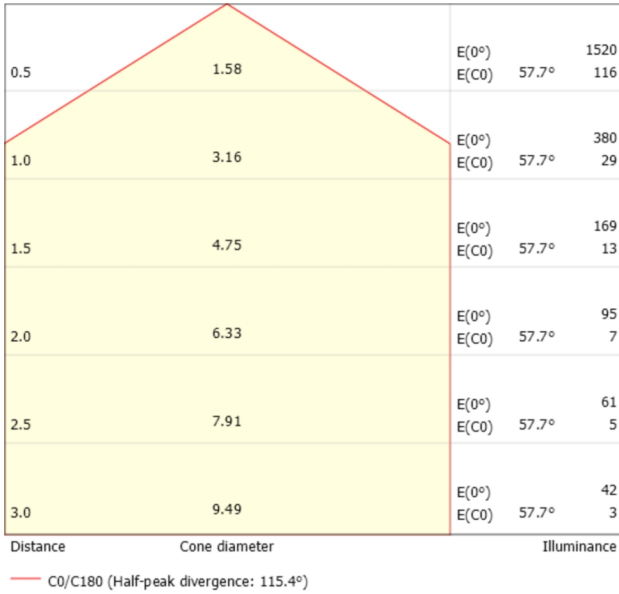

## Glare evaluation according to UGR

p Ceiling		70	70	50	50	30	70	70	50	50	30		
p Walls		50	30	50	30	30	50	30	50	30	30		
p Floor		20	20	20	20	20	20	20	20	20	20		
Room size	Viewing direction at □ right angles to lamp axis						Viewing direction □ parallel to lamp axis						
	X	Y											
2H	2H	29.1	30.4	29.4	30.7	30.9	29.1	30.4	29.4	30.7	30.9		
2H	3H	30.6	31.9	31.0	32.1	32.4	30.7	31.9	31.0	32.1	32.4		
2H	4H	31.2	32.4	31.6	32.7	33.0	31.3	32.4	31.6	32.7	33.0		
2H	6H	31.7	32.7	32.0	33.0	33.3	31.7	32.7	32.1	33.1	33.4		
2H	8H	31.8	32.8	32.1	33.1	33.4	31.8	32.8	32.2	33.2	33.5		
2H	12H	31.8	32.8	32.2	33.1	33.5	31.9	32.9	32.3	33.2	33.5		
4H	2H	29.8	30.9	30.1	31.2	31.5	29.8	30.9	30.1	31.2	31.5		
4H	3H	31.5	32.5	31.9	32.8	33.2	31.5	32.5	31.9	32.8	33.2		
4H	4H	32.2	33.1	32.7	33.5	33.8	32.3	33.1	32.7	33.5	33.9		
4H	6H	32.8	33.5	33.2	33.9	34.3	32.8	33.6	33.2	33.9	34.3		
4H	8H	32.9	33.6	33.4	34.0	34.5	33.0	33.7	33.4	34.1	34.5		
4H	12H	33.0	33.7	33.5	34.1	34.5	33.1	33.7	33.5	34.1	34.6		
8H	4H	32.5	33.2	33.0	33.6	34.1	32.6	33.2	33.0	33.6	34.1		
8H	6H	33.2	33.7	33.7	34.2	34.6	33.2	33.8	33.7	34.2	34.7		
8H	8H	33.4	33.9	33.9	34.4	34.9	33.5	34.0	34.0	34.4	34.9		
8H	12H	33.6	34.0	34.1	34.5	35.0	33.6	34.1	34.1	34.5	35.0		
12H	4H	32.6	33.2	33.0	33.6	34.0	32.6	33.2	33.0	33.6	34.1		
12H	6H	33.2	33.7	33.7	34.2	34.7	33.3	33.8	33.8	34.2	34.7		
12H	8H	33.5	33.9	34.0	34.4	34.9	33.6	34.0	34.1	34.5	35.0		

Variation of the observer position for the luminaire distances S

Correction summand	+0.16/3	+0.16/3
S = 1.5H	+0.17/3	+0.17/3
Standard table	+0.16/3	+0.16/3
Correction summands referring to 1200lx at 1.5H luminous flux	+0.16/3	+0.16/3

State 02.11.2022

Technical amendments and errors reserved.