


Data sheet

L711H188+L711HAR1 - High Bay 130 - NW - reflector Alu 45deg

PROLED[®]

Article name: High Bay 130 - NW - reflector Alu 45deg

Article number: L711H188+L711HAR1

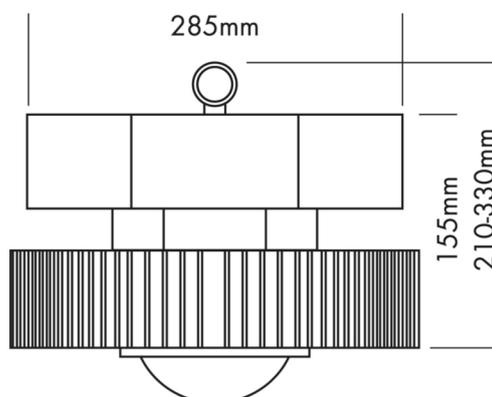

Article description:

LED high bay luminaire for factory buildings, production halls, assembly halls, storage buildings, sales areas, exhibition spaces, ...

Technical:

Mounting type:	Suspended	Electric:	
Adjustability:	Fixed	System power:	130 W
Controllability:	Dimmable	Current:	220-240 V
Safety:	IP20	Safety class:	1
Temperature range:	-40...55 °C	EEL:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	18.82

Shape and dimensions:

Height:	465 mm
Diameter:	420 mm
Weight:	5 kg

Light output 1 (LED 4000K - CRI 80):



Lamp type:	LED
Lamp power:	130 W
Total luminous flux:	13700 lm
Light efficiency:	105.4 lm/W
CCT:	4000 K
CRI:	80
Light distribution:	(Symmetrical) Medium flood (half value angle 15°...45°)

Status 08.12.2020

Technical amendments and errors reserved.

Data sheet

L711H188+L711HAR1 - High Bay 130 - NW - reflector Alu 45deg

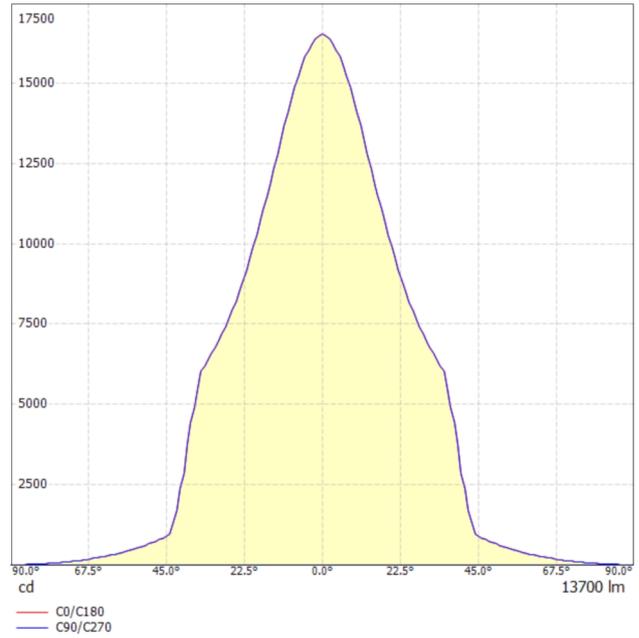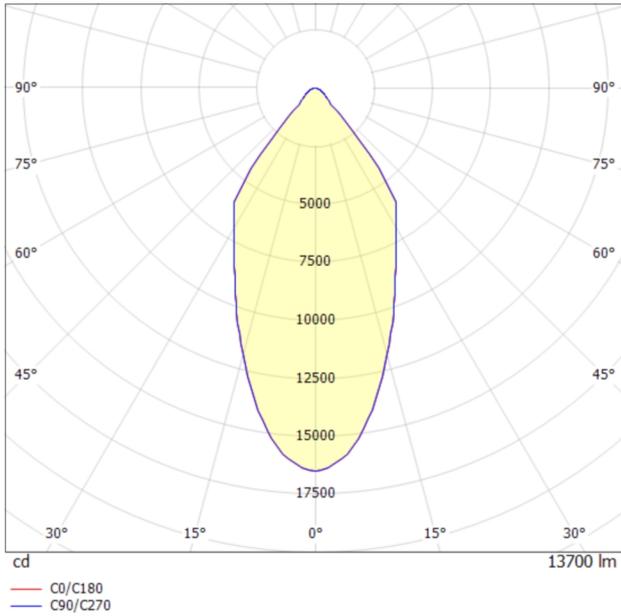

Distance	Cone diameter	E(0°)	E(C0)	24.7°	Illuminance
0.5	0.46	E(0°)	24.7°	70136	26363
1.0	0.92	E(0°)	24.7°	17534	6591
1.5	1.38	E(0°)	24.7°	7793	2929
2.0	1.84	E(0°)	24.7°	4384	1648
2.5	2.30	E(0°)	24.7°	2805	1055
3.0	2.76	E(0°)	24.7°	1948	732

— C0/C180 (Half-peak divergence: 49.4°)

Glare evaluation according to UGR

	70	70	50	50	30	70	70	50	50	30
ρ Ceiling	70	70	50	50	30	70	70	50	50	30
ρ Walls	50	30	50	30	30	50	30	50	30	30
ρ Floor	20	20	20	20	20	20	20	20	20	20

Room size	X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
			2H	4H	6H	8H	12H	2H	4H	6H	8H	12H
2H	2H	18.7	19.4	18.9	19.6	19.8	18.7	19.4	18.9	19.6	19.8	
2H	3H	18.8	19.5	19.0	19.7	19.9	18.8	19.5	19.0	19.7	19.9	
2H	4H	18.8	19.4	19.1	19.7	19.9	18.8	19.4	19.1	19.7	19.9	
2H	6H	18.8	19.3	19.1	19.6	19.9	18.8	19.3	19.1	19.6	19.9	
2H	8H	18.7	19.3	19.1	19.6	19.9	18.7	19.3	19.1	19.6	19.9	
2H	12H	18.7	19.2	19.1	19.6	19.9	18.7	19.2	19.1	19.6	19.9	
4H	2H	18.6	19.3	18.9	19.5	19.8	18.6	19.3	18.9	19.5	19.8	
4H	3H	18.8	19.3	19.1	19.6	19.9	18.8	19.3	19.1	19.6	19.9	
4H	4H	18.8	19.3	19.2	19.6	20.0	18.8	19.3	19.2	19.6	20.0	
4H	6H	18.8	19.2	19.2	19.6	20.0	18.8	19.2	19.2	19.6	20.0	
4H	8H	18.8	19.2	19.2	19.6	20.0	18.8	19.2	19.2	19.6	20.0	
4H	12H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9	
8H	4H	18.8	19.1	19.2	19.5	19.9	18.8	19.1	19.2	19.5	19.9	
8H	6H	18.8	19.1	19.3	19.5	19.9	18.8	19.1	19.3	19.5	19.9	
8H	8H	18.8	19.0	19.3	19.5	19.9	18.8	19.0	19.3	19.5	19.9	
8H	12H	18.8	19.0	19.3	19.4	19.9	18.8	19.0	19.3	19.4	19.9	
12H	4H	18.7	19.0	19.2	19.4	19.9	18.7	19.0	19.2	19.4	19.9	
12H	6H	18.8	19.0	19.2	19.4	19.9	18.8	19.0	19.2	19.4	19.9	
12H	8H	18.8	19.0	19.3	19.4	19.9	18.8	19.0	19.3	19.4	19.9	

Variation of the observer position for the luminaire distances S

S = 1.0H	+3.3 / -3.4	+3.3 / -3.4
S = 1.5H	+5.8 / -4.2	+5.8 / -4.2
S = 2.0H	+7.7 / -5.1	+7.7 / -5.1

Standard table	BK01	BK01
Correction summand	0.8	0.8

Correction glare indices referring to 13700lm total luminous flux

Status 08.12.2020

Technical amendments and errors reserved.


Data sheet

L711H188+L711HAR2 - High Bay 130 - NW - Reflektor Alu 70deg

PROLED[®]

Article name: High Bay 130 - NW - Reflektor Alu 70deg

Article number: L711H188+L711HAR2

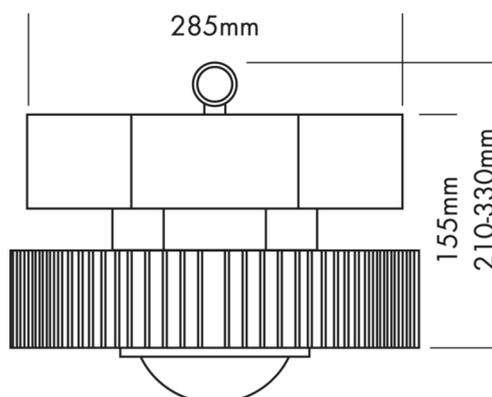

Article description:

LED high bay luminaire for factory buildings, production halls, assembly halls, storage buildings, sales areas, exhibition spaces, ...

Technical:

Mounting type:	Suspended	Electric:	
Adjustability:	Fixed	System power:	130 W
Controllability:	Dimmable	Current:	220-240 V
Safety:	IP20	Safety class:	1
Temperature range:	-40...55 °C	EEL:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	23.78

Shape and dimensions:

Height:	355 mm
Diameter:	495 mm
Weight:	5 kg

Light output 1 (LED 4000K - CRI 80):




Lamp type:	LED
Lamp power:	130 W
Total luminous flux:	13700 lm
Light efficiency:	105.4 lm/W
CCT:	4000 K
CRI:	80
Light distribution:	(Symmetrical) Wide flood (half value angle 45°...125°)

Status 08.12.2020

Technical amendments and errors reserved.

Data sheet

L711H188+L711HAR2 - High Bay 130 - NW - Reflektor Alu 70deg

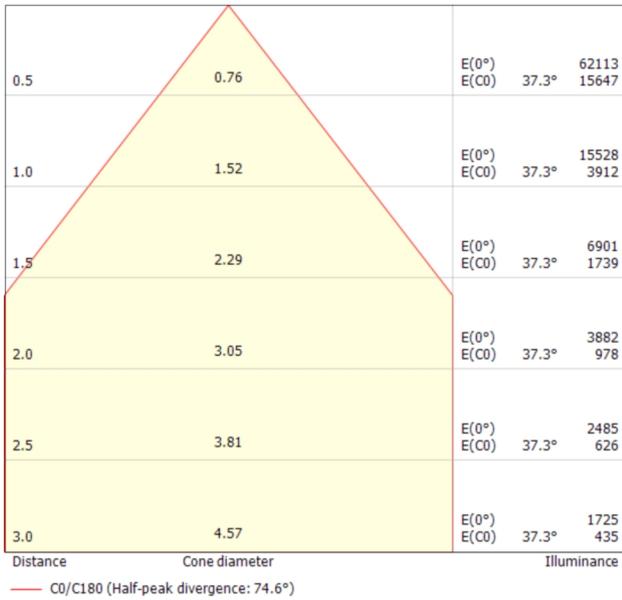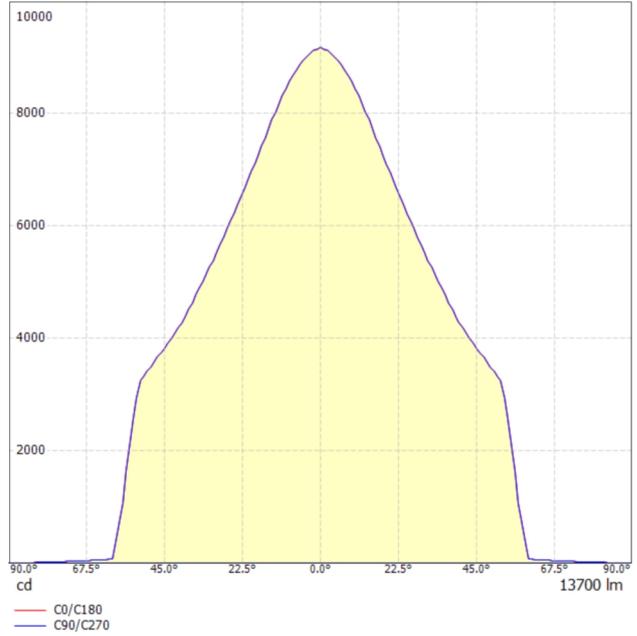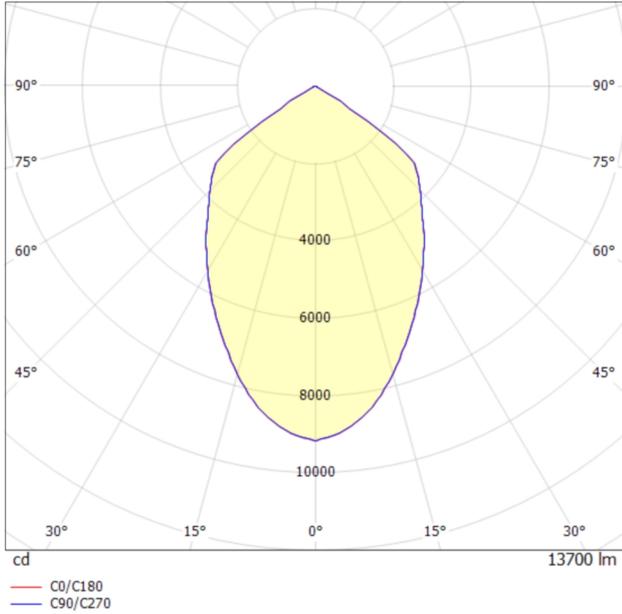

Glare evaluation according to UGR

	70	70	50	50	30	70	70	50	50	30
ρ Ceiling	70	70	50	50	30	70	70	50	50	30
ρ Walls	50	30	50	30	30	50	30	50	30	30
ρ Floor	20	20	20	20	20	20	20	20	20	20

Room size X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis						
		2H	3H	4H	6H	8H	12H	2H	3H	4H	6H	8H	12H
2H	2H	24.2	25.2	24.5	25.4	25.6	24.2	25.2	24.5	25.4	25.6	24.2	25.2
2H	3H	24.0	24.9	24.3	25.2	25.4	24.0	24.9	24.3	25.2	25.4	24.0	24.9
2H	4H	24.0	24.8	24.3	25.1	25.3	24.0	24.8	24.3	25.1	25.3	24.0	24.8
2H	6H	23.9	24.7	24.2	24.9	25.2	23.9	24.7	24.2	24.9	25.2	23.9	24.7
2H	8H	23.9	24.6	24.2	24.9	25.2	23.9	24.6	24.2	24.9	25.2	23.9	24.6
2H	12H	23.8	24.5	24.2	24.8	25.1	23.8	24.5	24.2	24.8	25.1	23.8	24.5
4H	2H	24.1	24.9	24.4	25.2	25.5	24.1	24.9	24.4	25.2	25.5	24.1	24.9
4H	3H	24.0	24.6	24.3	25.0	25.3	24.0	24.6	24.3	25.0	25.3	24.0	24.6
4H	4H	23.9	24.5	24.3	24.8	25.2	23.9	24.5	24.3	24.8	25.2	23.9	24.5
4H	6H	23.8	24.3	24.2	24.7	25.1	23.8	24.3	24.2	24.7	25.1	23.8	24.3
4H	8H	23.8	24.2	24.2	24.6	25.0	23.8	24.2	24.2	24.6	25.0	23.8	24.2
4H	12H	23.7	24.2	24.2	24.6	25.0	23.7	24.2	24.2	24.6	25.0	23.7	24.2
8H	4H	23.8	24.2	24.2	24.6	25.0	23.8	24.2	24.2	24.6	25.0	23.8	24.2
8H	6H	23.7	24.1	24.1	24.5	24.9	23.7	24.1	24.1	24.5	24.9	23.7	24.1
8H	8H	23.7	24.0	24.1	24.4	24.9	23.7	24.0	24.1	24.4	24.9	23.7	24.0
8H	12H	23.6	23.9	24.1	24.4	24.9	23.6	23.9	24.1	24.4	24.9	23.6	23.9
12H	4H	23.7	24.2	24.2	24.6	25.0	23.7	24.2	24.2	24.6	25.0	23.7	24.2
12H	6H	23.7	24.0	24.1	24.4	24.9	23.7	24.0	24.1	24.4	24.9	23.7	24.0
12H	8H	23.6	23.9	24.1	24.4	24.9	23.6	23.9	24.1	24.4	24.9	23.6	23.9

Variation of the observer position for the luminaire distances S

S = 1.0H	+1.7 / -1.4	+1.7 / -1.4
S = 1.5H	+2.9 / -18.4	+2.9 / -18.4
S = 2.0H	+4.4 / -19.1	+4.4 / -19.1

Standard table	BK00	BK00
Correction summand	5.7	5.7

Correction glare indices referring to 13700lm total luminous flux

Status 08.12.2020

Technical amendments and errors reserved.


Data sheet

L711H188+L711HAR4 - High Bay 130 - NW - Refl. Polycarbonate

PROLED[®]

Article name: High Bay 130 - NW - Refl. Polycarbonate

Article number: L711H188+L711HAR4

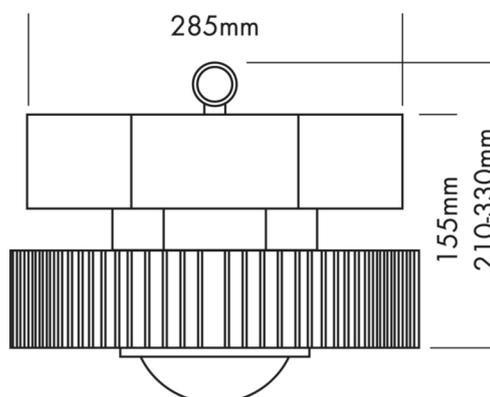

Article description:

LED high bay luminaire for factory buildings, production halls, assembly halls, storage buildings, sales areas, exhibition spaces, ...

Technical:

Mounting type:	Suspended	Electric:	
Adjustability:	Fixed	System power:	130 W
Controllability:	Dimmable	Current:	220-240 V
Safety:	IP20	Safety class:	1
Temperature range:	-40...55 °C	EEL:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	18.1

Shape and dimensions:

Height:	480 mm
Diameter:	410 mm
Weight:	5 kg

Light output 1 (LED 4000K - CRI 80):



Lamp type:	LED
Lamp power:	130 W
Total luminous flux:	13700 lm
Light efficiency:	105.4 lm/W
CCT:	4000 K
CRI:	80
Light distribution:	(Symmetrical) Wide flood (half value angle 45°...125°)

Status 08.12.2020

Technical amendments and errors reserved.

Data sheet

L711H188+L711HAR4 - High Bay 130 - NW - Refl. Polycarbonate

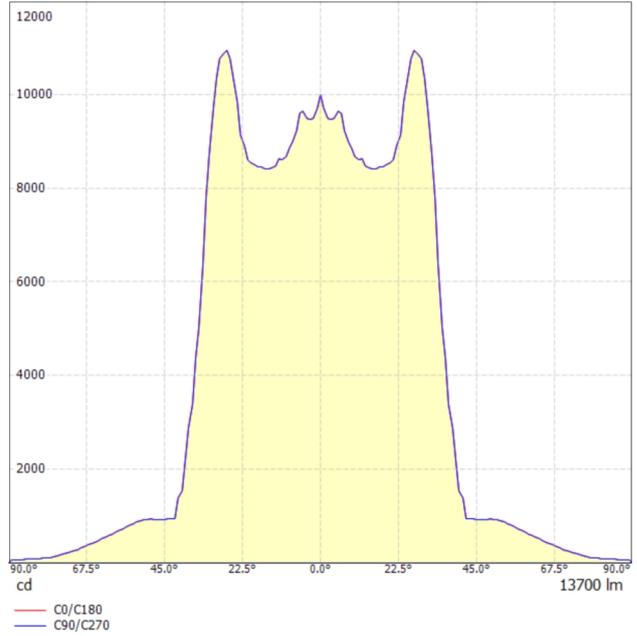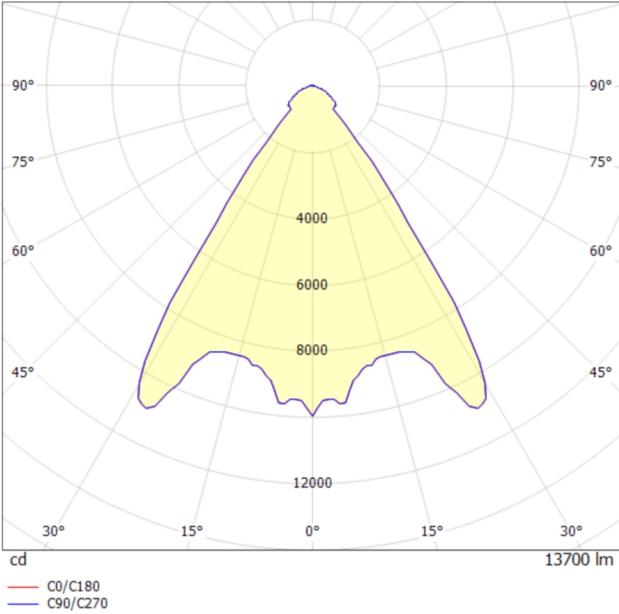

Distance	Cone diameter	E(0°)	E(C0)	34.6°	Illuminance
0.5	0.69	E(0°)	34.6°	42179	13098
1.0	1.38	E(0°)	34.6°	10545	3274
1.5	2.07	E(0°)	34.6°	4687	1455
2.0	2.76	E(0°)	34.6°	2636	819
2.5	3.45	E(0°)	34.6°	1687	524
3.0	4.14	E(0°)	34.6°	1172	364

— C0/C180 (Half-peak divergence: 69.2°)

Glare evaluation according to UGR

	70	70	50	50	30	70	70	50	50	30
ρ Ceiling	70	70	50	50	30	70	70	50	50	30
ρ Walls	50	30	50	30	30	50	30	50	30	30
ρ Floor	20	20	20	20	20	20	20	20	20	20

Room size	X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
			2H	4H	6H	8H	12H	2H	4H	6H	8H	12H
2H	2H	17.7	18.5	18.0	18.7	19.0	17.7	18.5	18.0	18.7	19.0	
2H	3H	17.9	18.6	18.2	18.9	19.2	17.9	18.6	18.2	18.9	19.2	
2H	4H	17.9	18.6	18.3	18.9	19.2	17.9	18.6	18.3	18.9	19.2	
2H	6H	17.9	18.5	18.3	18.8	19.2	17.9	18.5	18.3	18.8	19.2	
2H	8H	17.9	18.5	18.3	18.8	19.2	17.9	18.5	18.3	18.8	19.2	
2H	12H	17.9	18.5	18.3	18.8	19.1	17.9	18.5	18.3	18.8	19.1	
4H	2H	17.7	18.4	18.1	18.7	19.0	17.7	18.4	18.1	18.7	19.0	
4H	3H	18.0	18.6	18.4	18.9	19.3	18.0	18.6	18.4	18.9	19.3	
4H	4H	18.1	18.6	18.5	19.0	19.3	18.1	18.6	18.5	19.0	19.3	
4H	6H	18.1	18.5	18.5	18.9	19.3	18.1	18.5	18.5	18.9	19.3	
4H	8H	18.1	18.5	18.5	18.9	19.3	18.1	18.5	18.5	18.9	19.3	
4H	12H	18.1	18.4	18.6	18.9	19.3	18.1	18.4	18.6	18.9	19.3	
8H	4H	18.1	18.4	18.5	18.8	19.3	18.1	18.4	18.5	18.8	19.3	
8H	6H	18.1	18.4	18.6	18.8	19.3	18.1	18.4	18.6	18.8	19.3	
8H	8H	18.1	18.4	18.6	18.8	19.3	18.1	18.4	18.6	18.8	19.3	
8H	12H	18.1	18.3	18.6	18.8	19.4	18.1	18.3	18.6	18.8	19.4	
12H	4H	18.0	18.4	18.5	18.8	19.2	18.0	18.4	18.5	18.8	19.2	
12H	6H	18.1	18.3	18.5	18.8	19.3	18.1	18.3	18.5	18.8	19.3	
12H	8H	18.1	18.3	18.6	18.8	19.3	18.1	18.3	18.6	18.8	19.3	

Variation of the observer position for the luminaire distances S

S = 1.0H	+4.1 / -2.2	+4.1 / -2.2
S = 1.5H	+6.6 / -3.0	+6.6 / -3.0
S = 2.0H	+8.5 / -4.0	+8.5 / -4.0

Standard table	BK01	BK01
Correction summand	0.1	0.1

Correction glare indices referring to 13700lm total luminous flux

Status 08.12.2020

Technical amendments and errors reserved.


Data sheet

L711H188+L711HAR5 - High Bay 130 - NW - Refl. Polycarbonate + Cover

PROLED[®]

Article name: High Bay 130 - NW - Refl. Polycarbonate + Cover

Article number: L711H188+L711HAR5

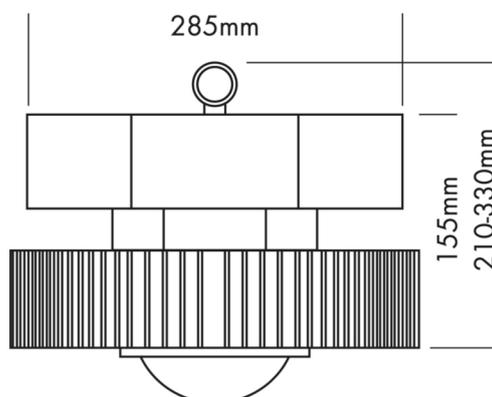

Article description:

LED high bay luminaire for factory buildings, production halls, assembly halls, storage buildings, sales areas, exhibition spaces, ...

Technical:

Mounting type:	Suspended	Electric:	
Adjustability:	Fixed	System power:	130 W
Controllability:	Dimmable	Current:	220-240 V
Safety:	IP20	Safety class:	1
Temperature range:	-40...55 °C	EEL:	A++ - A
Lifetime:	50.000 h at L80B10	UGR:	19.53

Shape and dimensions:

Height:	480 mm
Diameter:	410 mm
Weight:	5 kg

Light output 1 (LED 4000K - CRI 80):



Lamp type:	LED
Lamp power:	130 W
Total luminous flux:	13700 lm
Light efficiency:	105.4 lm/W
CCT:	4000 K
CRI:	80
Light distribution:	(Symmetrical) Wide flood (half value angle 45°...125°)

Status 08.12.2020

Technical amendments and errors reserved.

Data sheet

L711H188+L711HAR5 - High Bay 130 - NW - Refl. Polycarbonate + Cover

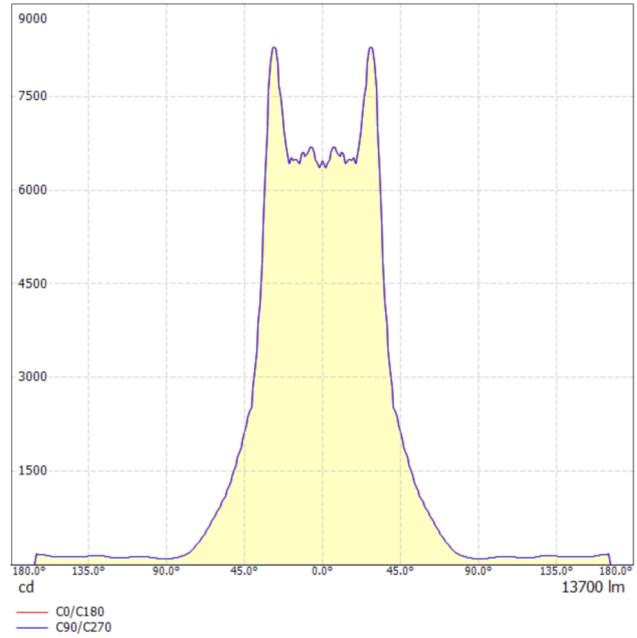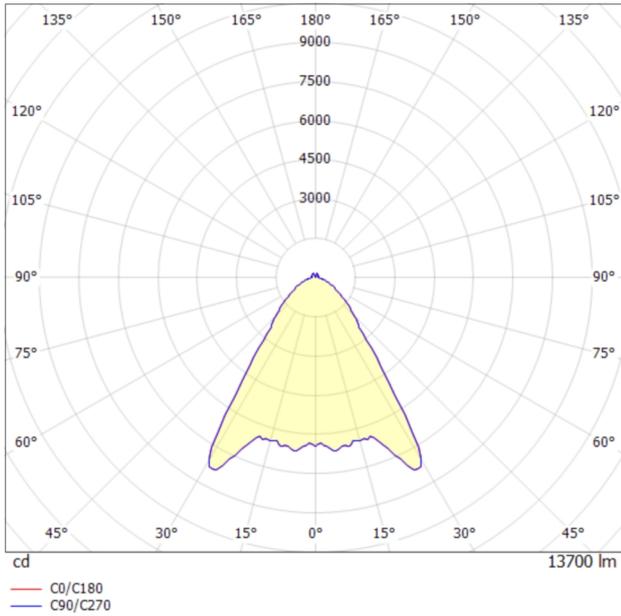

Distance	Cone diameter	E(0°)	E(C0)	36.1°	27308
0.5	0.73	E(0°)	E(C0)	36.1°	9278
1.0	1.46	E(0°)	E(C0)	36.1°	6827
1.5	2.19	E(0°)	E(C0)	36.1°	2320
2.0	2.92	E(0°)	E(C0)	36.1°	3034
2.5	3.65	E(0°)	E(C0)	36.1°	1031
3.0	4.38	E(0°)	E(C0)	36.1°	1707
		E(0°)	E(C0)	36.1°	580
		E(0°)	E(C0)	36.1°	1092
		E(0°)	E(C0)	36.1°	371
		E(0°)	E(C0)	36.1°	759
		E(0°)	E(C0)	36.1°	258

Distance Cone diameter Illuminance

— C0/C180 (Half-peak divergence: 72.2°)

Glare evaluation according to UGR

	70	70	50	50	30	70	70	50	50	30
p Ceiling	70	70	50	50	30	70	70	50	50	30
p Walls	50	30	50	30	30	50	30	50	30	30
p Floor	20	20	20	20	20	20	20	20	20	20

Room size	X	Y	Viewing direction at right angles to lamp axis					Viewing direction parallel to lamp axis				
			2H	4H	6H	8H	12H	2H	4H	6H	8H	12H
2H	2H	18.9	19.8	19.2	20.1	20.4	18.9	19.8	19.2	20.1	20.4	
2H	3H	19.2	20.0	19.6	20.3	20.7	19.2	20.0	19.6	20.3	20.7	
2H	4H	19.2	20.0	19.6	20.4	20.7	19.2	20.0	19.6	20.4	20.7	
2H	6H	19.2	19.9	19.6	20.3	20.7	19.2	19.9	19.6	20.3	20.7	
2H	8H	19.2	19.9	19.6	20.3	20.7	19.2	19.9	19.6	20.3	20.7	
2H	12H	19.2	19.8	19.6	20.3	20.7	19.2	19.8	19.6	20.3	20.7	
4H	2H	19.0	19.8	19.4	20.1	20.5	19.0	19.8	19.4	20.1	20.5	
4H	3H	19.4	20.0	19.8	20.5	20.9	19.4	20.0	19.8	20.5	20.9	
4H	4H	19.5	20.1	20.0	20.5	21.0	19.5	20.1	20.0	20.5	21.0	
4H	6H	19.5	20.0	20.0	20.5	21.0	19.5	20.0	20.0	20.5	21.0	
4H	8H	19.5	20.0	20.0	20.5	21.0	19.5	20.0	20.0	20.5	21.0	
4H	12H	19.5	19.9	20.1	20.4	21.0	19.5	19.9	20.1	20.4	21.0	
8H	4H	19.5	19.9	20.0	20.4	20.9	19.5	19.9	20.0	20.4	20.9	
8H	6H	19.5	19.9	20.1	20.4	21.0	19.5	19.9	20.1	20.4	21.0	
8H	8H	19.6	19.9	20.1	20.4	21.0	19.6	19.9	20.1	20.4	21.0	
8H	12H	19.6	19.8	20.2	20.4	21.0	19.6	19.8	20.2	20.4	21.0	
12H	4H	19.4	19.8	20.0	20.3	20.9	19.4	19.8	20.0	20.3	20.9	
12H	6H	19.5	19.8	20.1	20.3	20.9	19.5	19.8	20.1	20.3	20.9	
12H	8H	19.5	19.8	20.1	20.4	21.0	19.5	19.8	20.1	20.4	21.0	

Variation of the observer position for the luminaire distances S

S = 1.0H	+1.9 / -1.3	+1.9 / -1.3
S = 1.5H	+3.7 / -2.2	+3.7 / -2.2
S = 2.0H	+5.4 / -3.2	+5.4 / -3.2

Standard table	BK02	BK02
Correction summand	2.1	2.1

Correction glare indices referring to 13700lm total luminous flux

Status 08.12.2020

Technical amendments and errors reserved.